

# (12) UK Patent Application (19) GB (11) 2 239 567 (13) A

(43) Date of A publication 03.07.1991

(21) Application No 9007681.1

(22) Date of filing 05.04.1990

(71) Applicant  
Technophone Limited

(Incorporated in the United Kingdom)

Ashwood House, Pembroke Broadway, Camberley,  
Surrey, GU15 3SP, United Kingdom

(72) Inventor  
Mark Powell

(74) Agent and/or Address for Service  
T J Frain  
Technophone Limited, Ashwood House,  
Pembroke Broadway, Camberley, Surrey, GU15 3SP,  
United Kingdom

(51) INT CL<sup>a</sup>  
H04B 1/38, H01M 10/00, H02J 7/00 // H01M 10/48


(52) UK CL (Edition K)  
H2H HBCA HBCD HBCE HBCG H24R  
H4L LECX L1H10 L1H3  
U1S S2204 S2215

(56) Documents cited  
GB 2219151 A GB 1438439 A EP 0340794 A2  
EP 0181112 A2 EP 0124739 A1 US 4593409 A

(58) Field of search  
UK CL (Edition K) H2H HBCD HBCE HBCF HBCG  
HBCH HBD, H4L LECX  
INT CL<sup>a</sup> H02J 7/00 7/02 7/04 7/06 7/08 7/10 7/12,  
H04B 1/00 1/38 1/40 7/24 7/26, H04M 1/72, H04Q  
7/00 7/02 7/04

(54) Portable radio telephone useable with batteries of different types; battery charging

(57) A portable cellular telephone 1 is adapted to have removably connected thereto a battery 2 selected from at least two different battery types. The resistance of a resistor 7 in the battery 2 identifies the battery type which can be detected in the telephone 1 by means of a voltage source 10, a voltage sensor 13 and a resistor 11 forming a potential divider with resistor 7. The types of battery may be low and high energy versions of batteries having essentially the same chemical and physical composition, or batteries of different chemical and/or physical composition. When the telephone 1 is coupled to a battery charger, a control signal is generated by a microprocessor 9 so that a charging mode compatible with the battery type in use is established. The microprocessor 9 may disable the telephone if it detects an unrecognisable battery, ie. without a resistor having an expected value. The battery temperature indicated by a thermistor 6 may be used to compensate battery voltage levels monitored during recharging to give a more accurate indication of charge state.

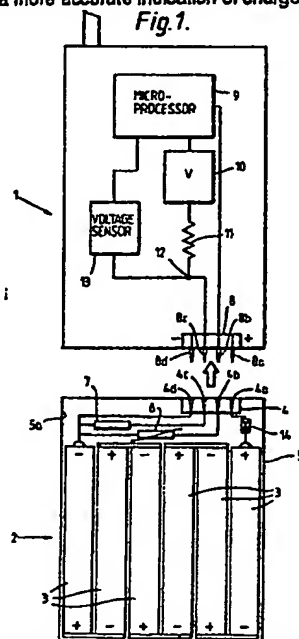


At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

GB 2 239 567 A


B 00307

1/2  
Fig.1.

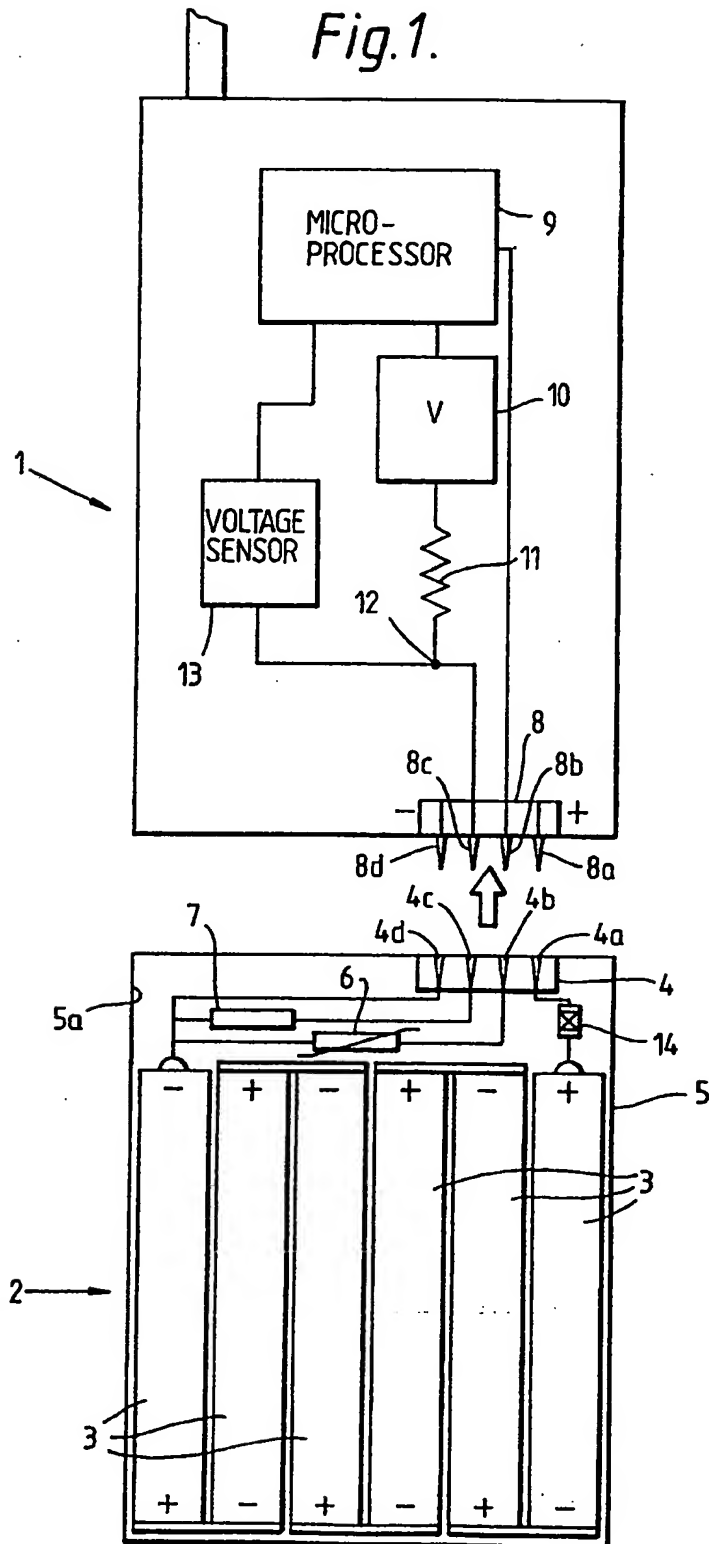

2/2

Fig. 2.

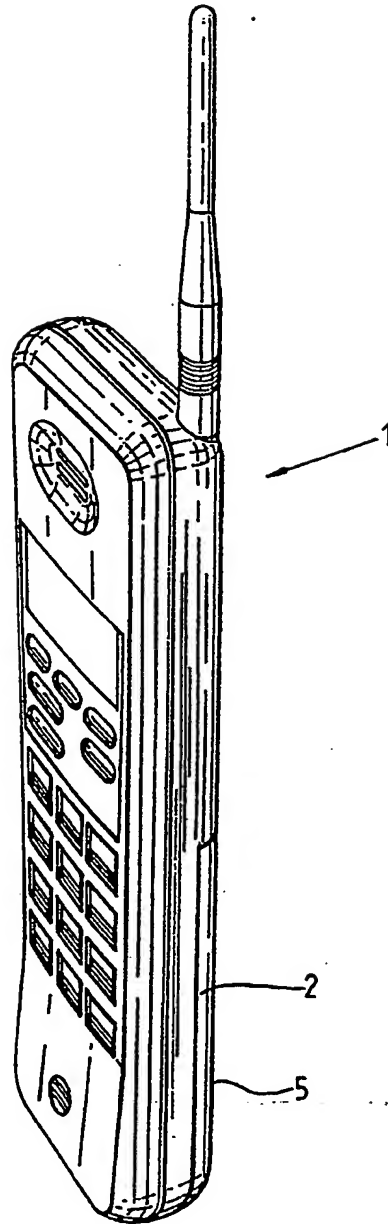

BATTERY POWERED RADIO TELEPHONE

This invention relates to a hand portable radio telephone adapted to have removably connected thereto a battery selected from at least two different battery types.

It is nowadays common practice for rechargeable batteries to be used in hand-held radio telephones, such as cellular telephones. However, particularly because of their transmission capability, portable cellular telephones consume a significant amount of power necessitating relatively frequent recharging of the batteries.

High energy batteries are therefore sometimes used when a longer interval is desirable between re-charging. However, the higher the energy of the battery, the heavier and more bulky it tends to be. It is particularly convenient therefore if the telephone is adapted to use interchangeably either a high or low energy battery selected by the user depending on the particular circumstances under which he intends to use the telephone. Hence, a low energy battery would be suitable if the user intends to use the telephone for relatively few short telephone calls over a given period, whereas a high energy battery may be more suitable if it is intended to make longer or more calls over an extended period.

A drawback with using different battery types is that they may require different recharging regimes which, if not adhered to, may adversely affect performance and/or the overall useful life time of the batteries.

According to a first aspect of the present invention there is provided a hand portable radio telephone adapted to have removably connected thereto a battery selected from at least two different types of battery, said battery comprising means for identifying the battery type, wherein the telephone comprises means responsive to said identifying means for determining the type of battery connected thereto.

A radio telephone in accordance with the invention is capable of detecting the type of battery connected thereto and therefore can respond accordingly, especially with regard to the mode of recharging used.

It is noted here that the different types of battery may be low and high energy versions of batteries having essentially the same chemical and physical composition or they may alternatively be batteries having different chemical and/or physical composition.

The radio telephone may be adapted to become inoperative if it detects an unrecognisable or unidentified battery.

Suitably the battery type determining means includes means for deriving a signal indicative of the battery type. Specifically, the determining means may include means for generating a reference signal, in which case the identifying means (in the battery) is adapted to modify the reference signal to provide the signal indicative of the battery type.

Preferably the battery comprises a unitary housing enclosing the identifying means which may, for example, be formed by a single resistor, the resistance value of which represents the battery type. The battery determining means in the telephone may also comprise a resistor of known resistance value connected to a known voltage source. When the battery is connected to the telephone these two resistors are arranged to be connected together in the manner of a potential divider whereby the voltage at the junction of the two resistors is indicative of the battery type. Therefore, means are also provided for sensing the voltage between these two resistors.

In a particular embodiment complementary connecting means are provided respectively on the telephone and on the battery for automatically coupling the two resistors in series when the battery is connected to the telephone.

According to a further aspect of the present invention there is provided a battery for use in a hand portable radio telephone in accordance with the first aspect of the invention, comprising a housing enclosing a plurality of interconnected rechargeable cells and means for electrically identifying the battery type.

An embodiment of the invention will now be described by way of example, with reference to the accompanying drawings in which:-

Figure 1 is a schematic illustration of a radio telephone shown separated from an interchangeable battery in accordance with the invention, and

Figure 2 is a perspective view of the radio telephone in Figure 1, with the battery connected to the telephone.

The apparatus shown in Figures 1 and 2 is a cellular portable telephone 1 comprising a rechargeable battery pack 2. The battery pack 2 may for example contain six identical series-connected NiCd cells 3 each having a nominal voltage of 1.2V. The battery pack, therefore, has a nominal voltage of 7.2V. The capacity of the cells is typically 600 mAh for a regular battery pack, whereas in the case of a high energy version the capacity may be, for example, 850 mAh.

The individual cells are rectangular in cross-section and are arranged side-by-side in close packed configuration to yield a particularly compact battery pack 2. In an alternative arrangement the cells may be arranged in two rows of three cells, for example. In any case the cells 3 and associated circuitry (described hereinafter) are enclosed in a unitary housing 5.

The battery housing 5 comprises a socket 4 having 4 connectors 4a, 4b, 4c, 4d. Socket 4a is connected to the positive terminal of the cells 3 via a fuse 14 and socket 4d is connected to the negative terminal of the cells 3. Socket 4b is connected to the negative terminal (effectively earth) via a thermistor 6 located in the close proximity of the cells 3 so that the signal appearing on terminal 4b is indicative of the local temperature of the battery.

Socket 4c is connected to the negative terminal of the cells 3 (effectively earth) via a resistor 7. The value of the resistor indicates the type of battery being used. For example, the Applicant has used a resistor of 47,000 ohms to identify a regular-energy battery having a capacity of 600 mAh, and a resistor of 68,000 ohms to identify a high-energy battery having a capacity of 850 mAh.

The battery 2 is capable of being connected to the telephone 1 as indicated by the arrow in Figure 1. Figure 2 shows the battery 2 connected to the telephone 1. The battery may be fitted by any suitable mechanical means, for example a battery 2 may be arranged to fit slideably onto the telephone 1. The telephone comprises an electrical connector 8 comprising protruding conductive pins 8a, 8b, 8c, 8d which engage respectively in the connectors 4a, 4b, 4c, 4d of socket 4 in the battery 2 when the battery is fully inserted on the telephone.

For the sake of clarity the positive and negative terminals 8a and 8d of connector 8 are shown without any further connections. Of course in practice these terminals would be connected to the main telephone circuitry for providing power thereto. It is noted here that the telephone 1 also includes a transceiver and all the other features conventionally found in a cellular telephone, but which also for the sake of clarity are not shown in the Figures. Also, since these aspects of the telephone are not relevant to the instant invention no further details will be given here, except to reiterate that the circuitry in the telephone is connected to the terminals 8a and 8d.

Terminal 8b connects with terminal 4b on the battery and, as mentioned above, the signal appearing thereon is indicative of the local temperature in the circuitry of the battery 2. This signal is applied to a microprocessor 9 within the telephone, which may use this temperature information to compensate for values of the battery voltage monitored during re-charging to give a more accurate indication of the charge state of the battery.

Terminal 8c of the telephone, which contacts connector 4c of the battery, is connected within the telephone 1 to a voltage source 10 generating a known voltage of, for example +5V via a resistor 11 having a known value of, for example, 180,000 ohms. Thus when the battery 2 is connected to the telephone the resistor 11 in the telephone is connected in series with the resistor 7 in the battery 2 in the manner of a potential divider. Indeed, the voltage at the junction 12 between the two resistors 10 and 7 indicates the value of the resistor 7 in the battery and hence is representative of the type of battery connected. For example with the values mentioned herein, when a regular-energy battery 2 is in use the voltage at junction 12 will be 1V, and when a high energy battery is used the voltage at junction 12 will be 1.5V.

A voltage sensor 13 is used to monitor the voltage at junction 12 and to feed a signal indicative thereof to microprocessor 9. The microprocessor may respond particularly for example during recharging to ensure that the battery is recharged in accordance with a mode compatible with the battery type. To this end the telephone may be adapted to be coupled to a charging

unit capable of operating in different charging modes in response to a control signal generated by the telephone, and managed by the microprocessor, as described and claimed in our co-pending British patent application No. <sup>9007683.7</sup> 1 (Our Ref PAT 90005).

Additionally or alternatively the microprocessor 9 may respond by rendering the whole telephone inoperative if a battery is used which does not include an identifying resistor, or if the value of such a resistor does not match an expected value i.e. indicating an unauthorised battery.

In view of the foregoing description, it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. In particular, the telephone may be capable of operating with more than two different battery types in which each type would be identified by its own unique resistance value. Furthermore the different battery type need not merely be a battery having a different electrical capacity, but may indeed have a different chemical or physical composition and therefore require a different charging regime which can thus be provided in response to the identifying signal sensed within the telephone.

CLAIMS

1. A hand portable radio telephone adapted to have removably connected thereto a battery selected from at least two different types of battery, said battery comprising means for identifying the battery type, wherein the telephone comprises means responsive to said identifying means for determining the type of battery connected thereto.
2. A hand portable radio telephone as claimed in claim 1, wherein the determining means includes means for deriving a signal indicative of the battery type.
3. A hand portable radio telephone as claimed in claim 1 or claim 2, wherein the determining means includes means for generating a predetermined signal, and the identifying means is adapted to modify the predetermined signal to provide a signal indicative of the battery type.
4. A hand portable radio telephone as claimed in any of the preceding claims wherein the battery comprises a unitary housing enclosing said identifying means.
5. A hand portable radio telephone as claimed in any of the preceding claims, wherein the identifying means comprises a first resistor, the resistance thereof being representative of the battery type.
6. A hand portable radio telephone as claimed in claim 5, wherein the battery type determining means comprises a second resistor connected to a voltage source, said first and second resistors being connected

in series when the battery is connected to the telephone.

7. A hand portable radio telephone as claimed in claim 6, including complementary connecting means provided respectively on the telephone and on the battery for coupling said first and second resistors in series.

8. A hand portable radio telephone as claimed in claim 6 or 7, wherein the battery type determining means further comprises means for sensing the voltage between said first and second resistors.

9. A hand portable radio telephone as claimed in any of the preceding claims, the battery further including means for generating a signal indicative of the temperature in the locality of the battery, means being provided for conveying said temperature indicative signal to said telephone.

10. A hand portable telephone adapted to have removably connected thereto a battery selected from at least two distinct battery types, substantially as herein described with reference to and illustrated in Figures 1 and 2 of the accompanying drawings.

11. A battery for use in a hand portable telephone claimed in any of the preceding claims, comprising a housing enclosing a plurality of interconnected rechargeable cells and means for electrically identifying the battery type.

12. A battery as claimed in claim 11 wherein the identifying means comprises a resistor.

B 00318